

Crystal Oscillator

OSC SMD5032



Applications

- PC Main board / VGA card / DVD / DVC / DSC / Printer / Scanner / Game Console

Features


- Ceramic package / Dimensions (5.0x 3.2x 0.9)
- Operating temperature -40~85°C
- Enable / Disable feature



Electrical Specifications

Item / Type			
Output Type	CMOS		
Output Load	15 pF	15 pF , 30 pF	15 pF , 50 pF
Oscillation Mode	Fundamental / 3rd Overtone		
Supply Voltage	1.8 V	2.5 V , 2.8 V , 3.3 V	5 V
Frequency Range	1 ~ 150 MHz		
Frequency Stability	± 50 ppm (-10 ~ + 70 °C), or specify		
Operating Temperature Range	- 40 ~ + 85 °C		
Storage Temperature Range	- 55 ~ + 125 °C		
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD		
Rise (Tr) / Fall (Tf) Time	10 ns Max.		
Supply Current	20 mA Max.	30 mA Max.	45 mA Max.
Symmetry	40 ~ 60 %		
Start-up Time	10 ms Max		
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max		
Aging (at 25 °C)	± 3 ppm / year Max.		

Dimensions

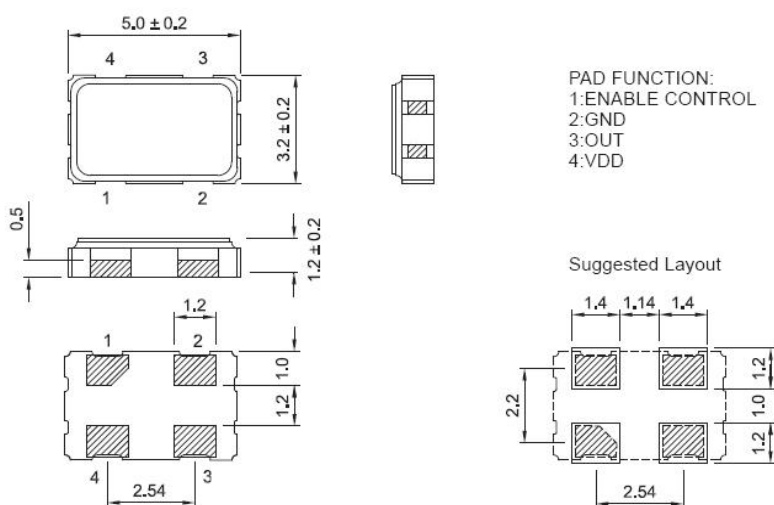

Units:mm