

Crystal Unit

SMD2520



Applications

- Mobile Communication / Bluetooth / Wireless LAN

Features

- Ultra thin / Dimensions (2.5×2.0×0.55)
- Ceramic SMD Package
- Vacuum Seam Sealed
- Tight Tolerance and Stability
- Reflow Soldering / Emboss Taping
- Compliant products with AEC-Q200




Electrical Specifications

Item / Type	
Frequency Range	12 ~ 66 MHz
Frequency Tolerance (at 25 °C)	± 10 ppm, ± 30 ppm, or specify
Frequency Stability Over Operating Temperature Range	± 10 ppm, ± 30 ppm, or specify
Operating Temperature Range	-10 ~ +70 °C, or specify
Shunt Capacitance (C0)	3 pF Max.
Drive Level	1 ~200 μW Max. (100uW typical)
Load Capacitance	8 pF, 10 pF, 12 pF, or specify
Aging (at 25 °C)	± 3 ppm / year Max.
Storage Temperature Range	- 40 ~ + 85 °C

Equivalent Series Resistance(ESR)

Fundamental	
12 ~ 13 MHz	150 Ω Max.
14 ~ 30 MHz	100 Ω Max.
30 ~ 66 MHz	60 Ω Max.

Dimensions

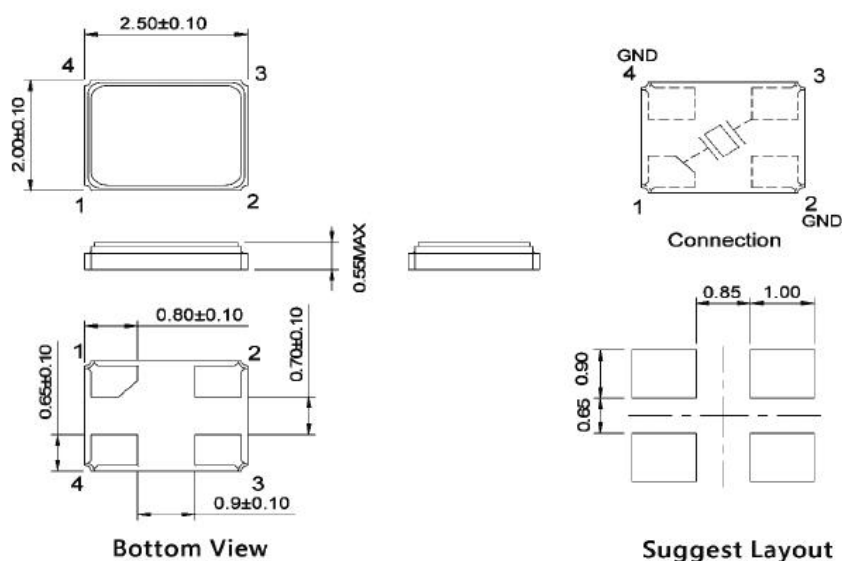

Units: mm